


COMANSA 5 LC 4010

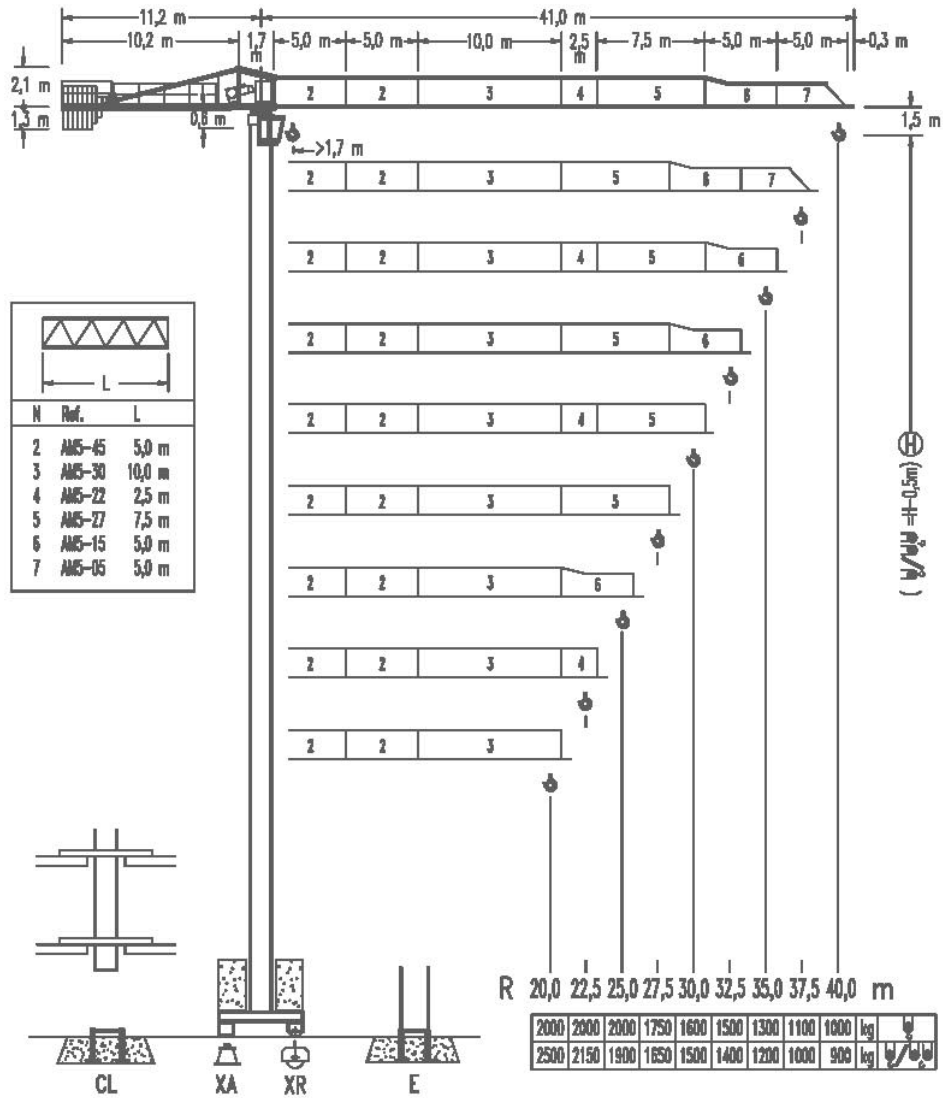

CE
DIN 15018 H1 B3

R	R(Cmax)	Cmax	20,0	22,5	25,0	27,5	30,0	32,5	35,0	37,5	40,0
40,0	22,3 m	2000	2000	1980	1750	1570	1420	1290	1180	1080	1000
	12,0 m	4000	2200	1910	1680	1490	1330	1200	1080	990	900
37,5	22,6 m	2000	2000	2000	1780	1590	1440	1310	1200	1100	
	12,1 m	4000	2230	1930	1700	1510	1350	1210	1100	1000	
35,0	24,2 m	2000	2000	2000	1930	1730	1560	1420	1300		
	12,9 m	4000	2410	2090	1840	1640	1470	1320	1200		
32,5	25,3 m	2000	2000	2000	1820	1650	1500				
	13,5 m	4000	2540	2210	1940	1730	1550	1400			
30,0	24,7 m	2000	2000	2000	1970	1770	1600				
	13,2 m	4000	2460	2140	1880	1670	1500				
27,5	24,5 m	2000	2000	2000	1950	1750					
	13,0 m	4000	2430	2110	1860	1650					
25,0	25,0 m	2000	2000	2000							
	13,3 m	4000	2480	2160	1900						
22,5	22,5 m	2000	2000								
	13,2 m	4000	2470	2150							
20,0	20,0 m	2000									
	13,3 m	4000	2500								